



SolidDrive®

OPERATION & USE GUIDE For SD1 Desktop Kit

Experience Audio Perfection

Induction Dynamics' extensive line of audio products makes it easy to create the ultimate audio system, regardless of installation requirements. Induction Dynamics builds these products with only the most select components and materials and utilizes numerous unique and proven technologies.

THE PORTABLE SOLIDDRIVE SD1 DESKTOP KIT is for use on top of any horizontal surface including glass, granite, metal, wood, ceramics, laminates and composites – turning the surface into a high-quality sound source.



OPERATING INSTRUCTIONS

The portable SolidDrive SD1 Desktop Kit is to be used with a laptop computer, portable CD player, or other sound source. The SolidDrive SD1 Desktop utilizes patent-pending technology to convert an audio signal into a powerful vibration that can be transferred into a table or countertop, evenly delivering sound from the entire surface.

The portable SolidDrive SD1 Desktop Kit includes one (1) SolidDrive SD1 Desktop, mini amplifier, 12V DC power supply, passive equalization module, four (4) electrical outlet adapters, all necessary cabling, instructions, and durable, padded carrying case.

The SolidDrive SD1 Desktop is connected to the output source through a standard size headphone jack. The special silicone rubber pad "grips" any non-porous surface.

SETUP

1. Insert the RCA cable from the SolidDrive SD1 Desktop/Desktop EQ into the AUDIO OUT of the amplifier.
2. Plug the power lead from the 12V DC power supply into the DC IN of the amplifier.
3. Select the appropriate electrical outlet adapter (in the USA, use adapter #0251A4) and snap it into the adapter slot on the DC power supply and plug it into a wall outlet.
4. Make sure that the volume is turned down. Plug the 3.5 mm jack from the amplifier into the headphone socket of the computer or other audio source.
5. Adjust volume on computer or other audio source to desired level. The audio output signal level will vary from computer to computer.






SolidDrive®



SOLIDDRIVE SD1 DESKTOP KIT ASSEMBLY SCHEMATIC

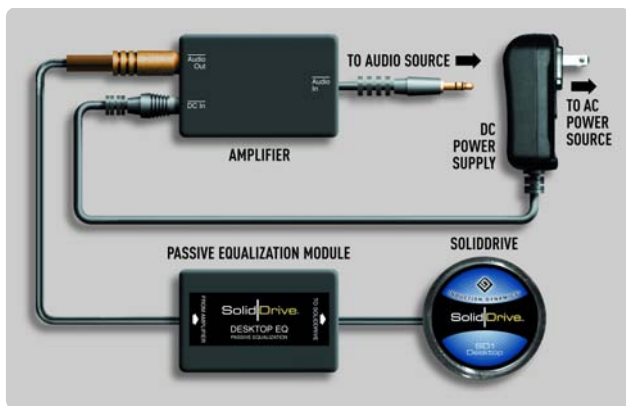

NOTE

The silicone rubber pad on the bottom of the SD1 Desktop is designed to "slightly grip" a horizontal surface. If it doesn't grip, then the surface may be too rough or too porous, or it may have dust on it. Use a damp paper towel to wipe off the surface and also off the bottom of the rubber pad.

WARRANTY

The product is guaranteed for 7 years from date of purchase. Any misuses or modifications to this equipment in any way will void the warranty.

WARNING

Read instructions prior to operating. To reduce the risk of fire or electric shock, do not expose this product to rain or moisture. Unplug prior to cleaning and clean with a damp cloth. There are no user-serviceable parts in this product, please refer all servicing to qualified personnel.

SolidDrives, SolidDrive Subwoofers, and A4 Amplifier come with a 7-year warranty.



SOLIDDRIVE SD1 DESKTOP PASSIVE EQUALIZATION MODULE

The SolidDrive SD1 Desktop Passive Equalization Module increases the system's sound performance for optimal listening enjoyment by using notch filters to correct peaks in the frequency response.

SolidDrive SD1 Desktop Kit Specifications

Type	Full Range Transducer
Impedance	8 Ohm
Frequency Response (Hz)	60 Hz to 15 kHz
Recommended Amplifier Power	10 – 100 Watts
Dimensions	2.28" Diameter x 2.08" Height
Weight	1.2 lb / .54 kg
Input to SolidDrive	RCA phone jack
AC ADAPTER	
Input	100 to 230 V AC, 50/60 Hz
Output	12 V DC / 0.83A
AMPLIFIER	
DC Input	12V DC
Audio Input	3.5 mm stereo jack
Output	RCA phone jack
CASE	
Dimensions	3 1/8" H x 10 3/4" W x 9" D
Weight	5 lb / 2.3 kg



INDUCTION DYNAMICS® | Experience Audio Perfection™

8650 College Boulevard • Overland Park, KS 66210 • TEL: 866.663.9770 • FAX: 913.663.9790

www.inductiondynamics.com / www.soliddrive.com